


# MB 1.2 STEEL



## MB 1.2 DESCRIPTION

Highest temperature service novolac vinyl ester with a special abrasion and impact resistant finish coat.

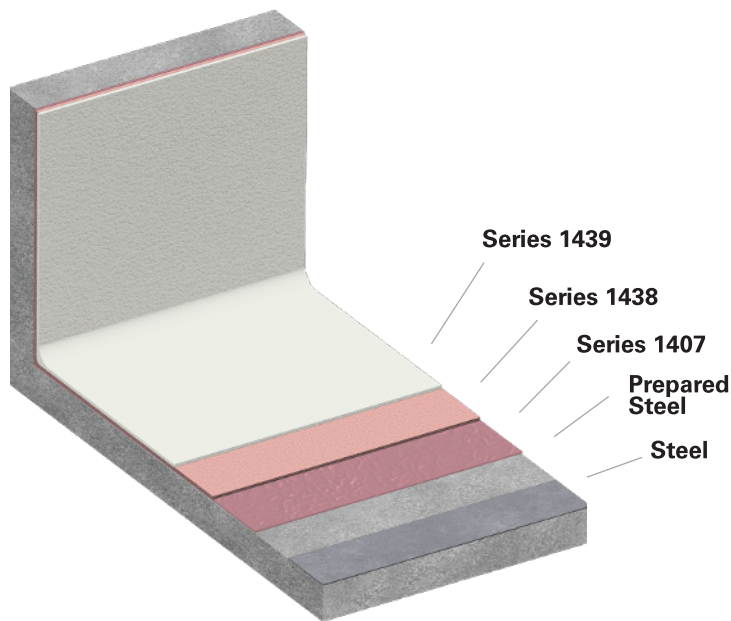

## COMMON AREAS OF USE

- As a lining in wet slurry, high suspended solids, dry high velocity particulates in air streams and for a release surface

## MB 1.2 DETAILS

<b>Surface Preparation</b>	SSPC-SP10 / NACE 2 / 3.0-mil minimum anchor profile	--	--
<b>Prime Coat (Stripe)</b>	Series <a href="#">1407</a> Vinester*	4-6 mils DFT	275 sq ft / gal
<b>First Coat</b>	Series <a href="#">1438</a> Vinester	20 mils DFT	65 sq ft / gal
<b>Finish Coat</b>	Series <a href="#">1439</a> Vinester	25 mils DFT	55 sq ft / gal
		<b>50 mils DFT</b>	

*\*Do not use Series 1407 in wet or dry services of >180°F (82°C) or 200°F (93°C) spikes. Preference is direct-to-metal.*

**Note:** Coverage rates are theoretical (no loss). Reference Tnemec data sheets, application guides and construction details for more information.

Published technical data, instructions and pricing are subject to change without notice. Contact your Tnemec technical representative for current technical data, instructions and pricing. Warranty information: The service life of Tnemec's coatings will vary. For warranty, limitation of seller's liability and product information, please refer to Tnemec Product Data Sheets at [tnemec.com](http://tnemec.com) or contact your Tnemec technical representative. © Tnemec Company, Inc. MB12S