


MB 3.0 CONCRETE



MB 3.0 DESCRIPTION

An epoxy flake filled vinyl ester, inert flake-filled lining.

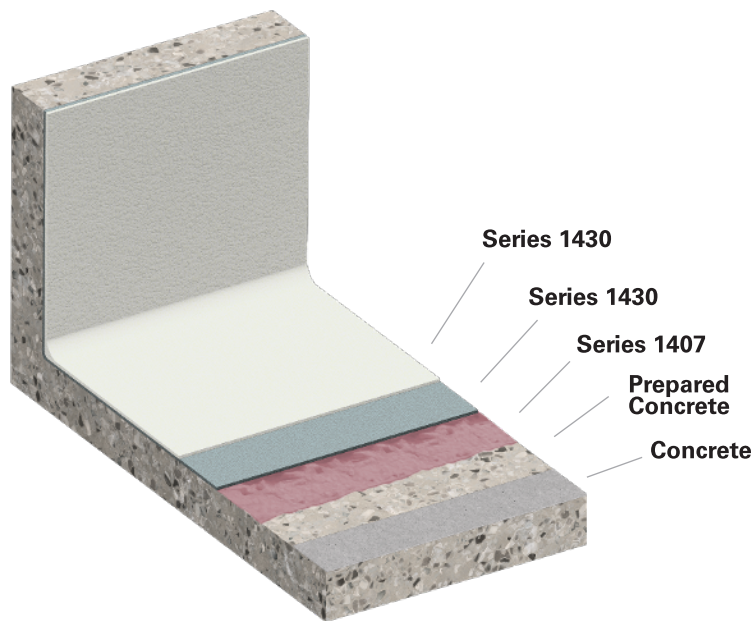

COMMON AREAS OF USE

- Industrial wastewater applications such as rake arms and equipment.
- Best for caustic services.

MB 3.0 DETAILS

| | | | |
|--------------------------------|---|--------------------|-----------------|
| Surface Preparation | SSPC-SP13 / NACE 6 - ICRI CSP 5 or greater | -- | -- |
| Concrete Rehabilitation | Series 217 MortarCrete, Series 215 Surfacing Epoxy or Primer + Series 211-9111 Bulking Powder | As required. | As required. |
| Prime Coat (Stripe) | Series 1407 Vinester* | 4-6 mils DFT | 275 sq ft / gal |
| First Coat | Series 1430 Vinester | 20 mils DFT | 65 sq ft /gal |
| Finish Coat | Series 1430 Vinester | 20 mils DFT | 65 sq ft /gal |
| | | 45 mils DFT | |

**Do not use Series 1407 in wet or dry services of >180°F (82°C) or 200°F (93°C) spikes. Preference is direct-to-metal.*

Note: Coverage rates are theoretical (no loss). Reference Tnemec data sheets, application guides and construction details for more information.

Published technical data, instructions and pricing are subject to change without notice. Contact your Tnemec technical representative for current technical data, instructions and pricing. Warranty information: The service life of Tnemec's coatings will vary. For warranty, limitation of seller's liability and product information, please refer to Tnemec Product Data Sheets at tnemec.com or contact your Tnemec technical representative. © Tnemec Company, Inc. MB30C