


SS 3.0 CONCRETE



SS 3.0 DESCRIPTION

Direct food contact service, compliant to 21 CFR 175.300.

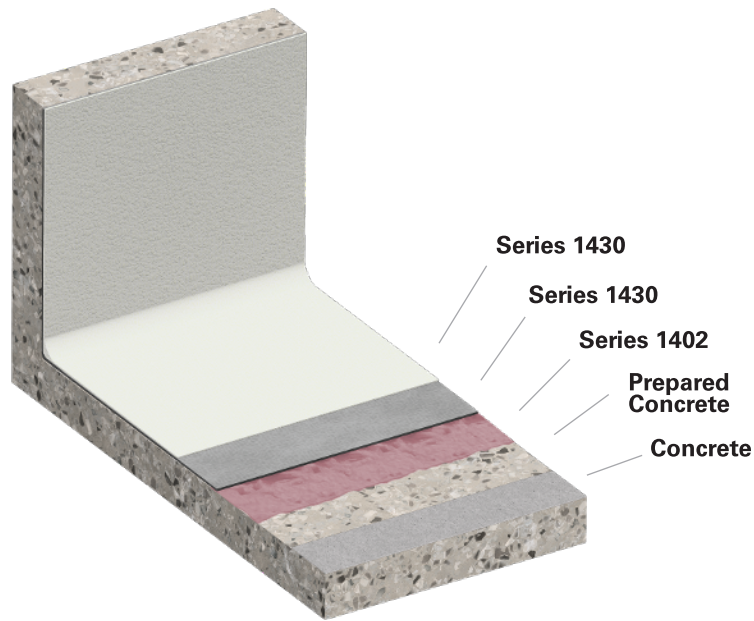

COMMON AREAS OF USE

- Medium duty on new tanks and vessels
- Most services below 150°F (66°C)
- Ethyl alcohol, spirits, wet starches, corn syrups and many other food and beverage process tanks

SS 3.0 DETAILS

Surface Preparation	SSPC-SP13 / NACE 6 - ICRI CSP 5 or greater	--	--
Concrete Rehabilitation	Series 217 MortarCrete, Series 215 Surfacing Epoxy or Primer + Series 211-9111 Bulking Powder		
Prime Coat (Stripe)	Series 1402 ProPolymer	3-5 mils DFT	340 sq ft / gal
Base Coat	Series 1430 ProPolymer	20 mils DFT	65 sq ft / gal
Finish Coat	Series 1430 ProPolymer	20 mils DFT	65 sq ft / gal

45 mils DFT

Note: Coverage rates are theoretical (no loss). Reference Tnemec data sheets, application guides and construction details for more information.

Published technical data, instructions and pricing are subject to change without notice. Contact your Tnemec technical representative for current technical data, instructions and pricing. Warranty information: The service life of Tnemec's coatings will vary. For warranty, limitation of seller's liability and product information, please refer to Tnemec Product Data Sheets at tnemec.com or contact your Tnemec technical representative. © Tnemec Company, Inc. SS30C