


# SS 3.1 STEEL



## SS 3.1 DESCRIPTION

Trowel base for restoration and service in direct food contact, compliant to 21 CFR 175.300.

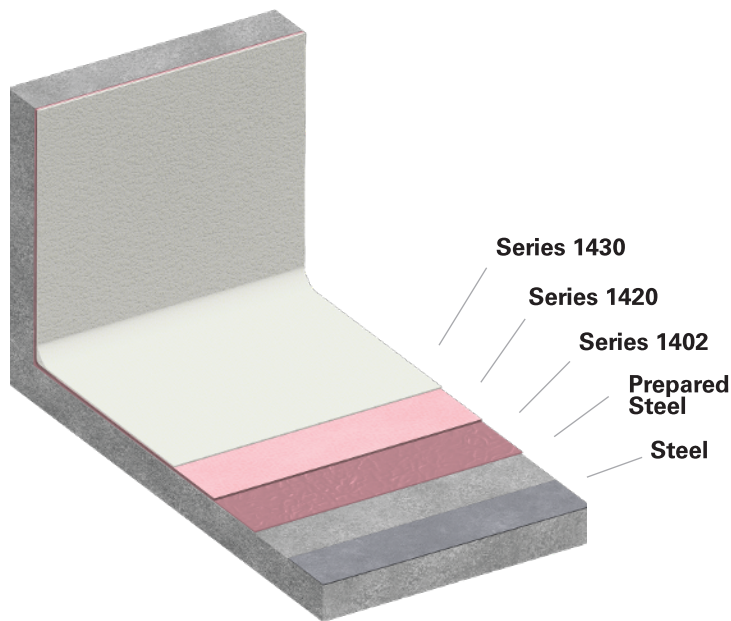

## COMMON AREAS OF USE

- New or pitted tanks and vessels
- Most services below 150°F (66°C)

## SS 3.1 DETAILS

<b>Surface Preparation</b>	SSPC-SP10 / NACE 2 / 3.0-mil minimum anchor profile	--	--
<b>Prime Coat (Stripe)</b>	Series <a href="#">1402</a> ProPolymer	3-5 mils DFT	340 sq ft / gal
<b>Base Coat</b>	Series <a href="#">1420</a> ProPolymer	60 mils DFT	23 sq ft / gal
<b>Finish Coat</b>	Series <a href="#">1430</a> ProPolymer	20 mils DFT	65 sq ft / gal
		<b>85 mils DFT</b>	

**Note:** Coverage rates are theoretical (no loss). Reference Tnemec data sheets, application guides and construction details for more information.

Published technical data, instructions and pricing are subject to change without notice. Contact your Tnemec technical representative for current technical data, instructions and pricing. Warranty information: The service life of Tnemec's coatings will vary. For warranty, limitation of seller's liability and product information, please refer to Tnemec Product Data Sheets at [tnemec.com](http://tnemec.com) or contact your Tnemec technical representative. © Tnemec Company, Inc. SS31S