


SS 3.2 DESCRIPTION

Double trowel base for restoration and service in direct food contact, compliant to 21 CFR 175.300.

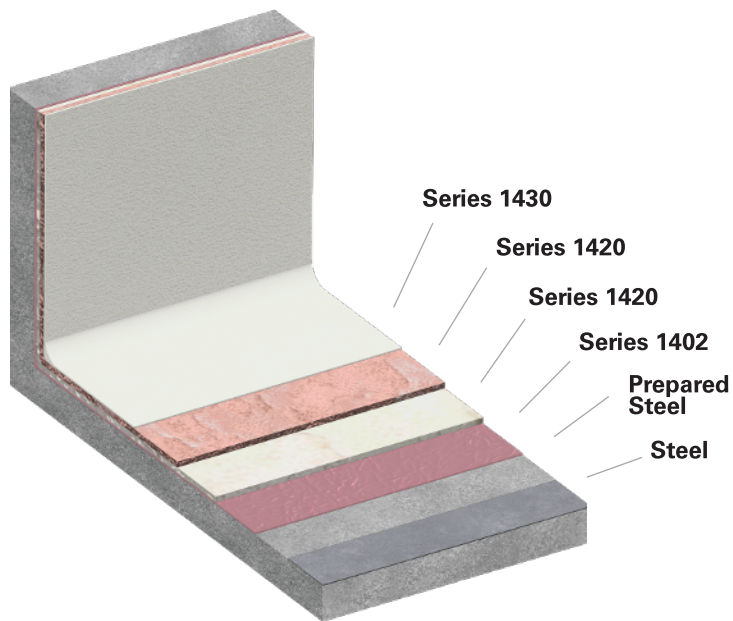

COMMON AREAS OF USE

- Non-insulated tanks with temperatures at or above 150°F (66°C)
- Pitted tanks
- Carbon or stainless steel tanks

SS 3.2 DETAILS

Surface Preparation	SSPC-SP10 / NACE 2 / 3.0-mil minimum anchor profile	--	--
Prime Coat (Stripe)	Series 1402 ProPolymer	3-5 mils DFT	340 sq ft / gal
Base Coat	Series 1420 ProPolymer	60 mils DFT	23 sq ft / gal
Mortar Coat	Series 1420 ProPolymer	60 mils DFT	23 sq ft / gal
Finish Coat	Series 1430 ProPolymer	20 mils DFT	65 sq ft / gal
		145 mils DFT	

Note: Coverage rates are theoretical (no loss). Reference Tnemec data sheets, application guides and construction details for more information.

Published technical data, instructions and pricing are subject to change without notice. Contact your Tnemec technical representative for current technical data, instructions and pricing. Warranty information: The service life of Tnemec's coatings will vary. For warranty, limitation of seller's liability and product information, please refer to Tnemec Product Data Sheets at tnemec.com or contact your Tnemec technical representative. © Tnemec Company, Inc. SS32S