

Sub-Flex EP MER System

SYSTEM DETAILS

Series 201 Epoxoprime

High-solids epoxy used for priming concrete, wood and drywall for numerous flooring and wall systems.

Series 206 Sub-Flex EP

Sub-Flex EP is a flexible underlayment for bridging small substrate cracks in concrete and to provide a protective waterproof membrane. Withstands up to 50 mils of differential movement of the substrate.

Series 297 Enviro-Glaze

Waterborne polyurethane coating for wall and floor applications. Provides enhanced abrasion resistance, stain resistance and color stability.




FEATURES AND BENEFITS

- Low odor for application near occupied spaces
- Flexible base layer
- Waterproof membrane
- Highly durable and easy to maintain
- Chemical resistant
- Enhanced abrasion resistance
- Enhanced stain resistance
- Basecoat can be combined with decorative systems

COMMON AREAS OF USE

- Mechanical rooms
- Elevated slabs in wet areas
- Concrete with minor cracking issues

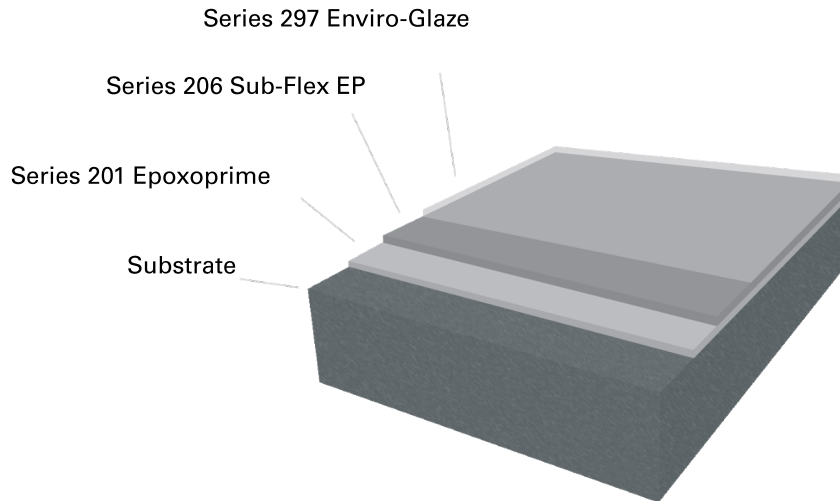

SYSTEM SPECIFICATIONS

Coating	Tnemec Product	Typical Thickness	Additional Information
Primer	Series 201 Epoxoprime	6.0-12.0 Mils DFT	Product Data Sheet
Intermediate	Series 206 Sub-Flex EP	30.0-80.0 Mils DFT	Product Data Sheet
Topcoat	Series 297 Enviro-Glaze	2.0-3.0 Mils DFT	Product Data Sheet
Optional Coving	Series 237 or Series N283 Coving Resin mixed with aggregate to form cove mortar	4" rolled radius or 1" cant coving	Product Data Sheet Product Data Sheet

THE RIGHT SYSTEM FOR YOUR PROJECT

For help determining the best coating system for your needs, contact your local Tnemec representative. Our representatives are among the most tenured and knowledgeable experts in the industry and can help you understand the benefits of specifying and applying the ideal coating system on your structures.

 **SpecLink** This flooring system is integrated in RIB SpecLink and available to specify within your workflow.

Published technical data, instructions and pricing are subject to change without notice. Contact your Tnemec technical representative for current technical data, instructions and pricing. Warranty information: The service life of Tnemec's coatings will vary. For warranty, limitation of seller's liability and product information, please refer to Tnemec Product Data Sheets at tnemec.com or contact your Tnemec technical representative. © Tnemec Company, Inc. FS6