


SS 4.1 DESCRIPTION

Elevated temp. trowel base for restoration and service in direct food contact, compliant to 21 CFR 175.300.

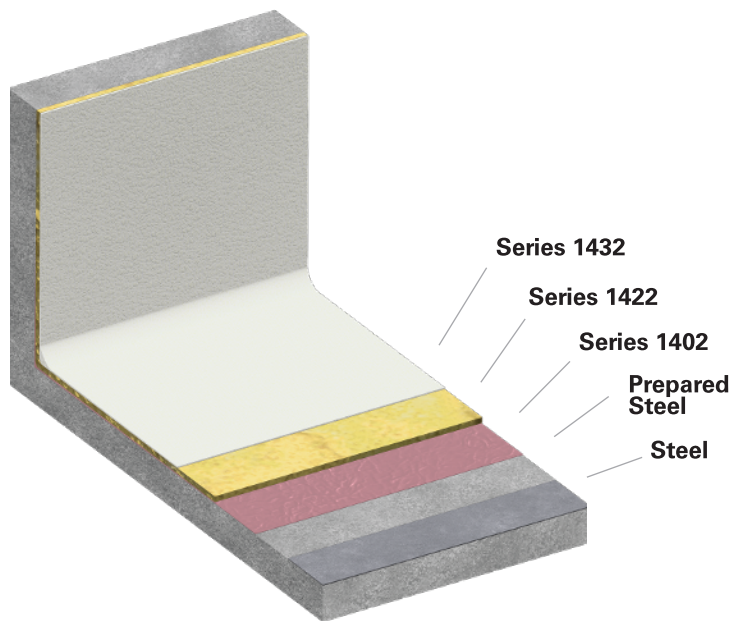

COMMON AREAS OF USE

- Preferred food grade lining system for restoration
- Temperatures above 150°F (66°C)
- As a robust lining that holds up to hot CIP chemicals and cleaning equipment

SS 4.1 DETAILS

Surface Preparation	SSPC-SP10 / NACE 2 / 3.0-mil minimum anchor profile	--	--
Prime Coat (Stripe)	Series 1402 ProPolymer	3-5 mils DFT	340 sq ft / gal
Base Coat	Series 1422 ProPolymer	60 mils DFT	23 sq ft / gal
Finish Coat	Series 1432 ProPolymer	20 mils DFT	65 sq ft / gal
		85 mils DFT	

Note: Coverage rates are theoretical (no loss). Reference Tnemec data sheets, application guides and construction details for more information.

Published technical data, instructions and pricing are subject to change without notice. Contact your Tnemec technical representative for current technical data, instructions and pricing. Warranty information: The service life of Tnemec's coatings will vary. For warranty, limitation of seller's liability and product information, please refer to Tnemec Product Data Sheets at tnemec.com or contact your Tnemec technical representative. © Tnemec Company, Inc. SS41S