


MB 6.0 CONCRETE



MB 6.0 DESCRIPTION

Spray-applied novolac epoxy vinyl ester with glass flakes, chopped strand mat, saturant reinforcement and a high-build finish coat.

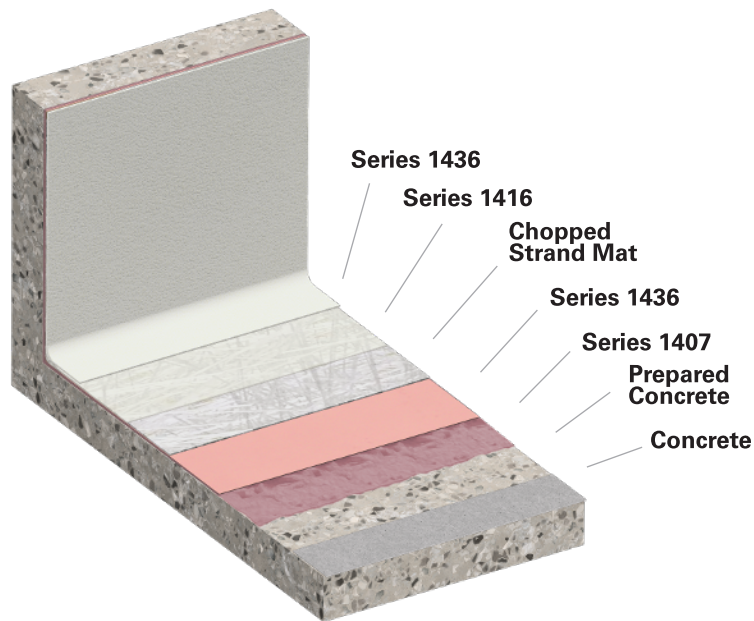

COMMON AREAS OF USE

- To meet FRP corrosion barrier guidelines for thickness and resin selection for efficacy in specific chemical environments
- As an all spray system to apply reinforcement over concrete or steel services like process and tanks and Exhaust Gas Cleaning Systems (EGCS)

MB 6.0 DETAILS

Surface Preparation	SSPC-SP13 / NACE 6 - ICRI CSP 5 or greater	--	--
Concrete Rehabilitation	Series 217 MortarCrete, Series 215 Surfacing Epoxy or Primer + Series 211-9111 Bulking Powder	As required.	As required.
Prime Coat (Stripe)	Series 1407 Vinester*	4-6 mils DFT	275 sq ft / gal
First Coat	Series 1436 Vinester	20 mils DFT	65 sq ft / gal
Mat	Series 211-0227 1.5-oz Chopped Strand Mat	--	--
Saturant	Series 1416-900 Vinester	20 mils DFT	60 sq ft / gal
Finish Coat	Series 1436 Vinester	20 mils DFT	65 sq ft / gal
		65 mils DFT	

*Do not use Series 1407 in wet or dry services of >180°F (82°C) or 200°F (93°C) spikes. Preference is direct-to-metal.

Note: Coverage rates are theoretical (no loss). Reference Tnemec data sheets, application guides and construction details for more information.

Published technical data, instructions and pricing are subject to change without notice. Contact your Tnemec technical representative for current technical data, instructions and pricing. Warranty information: The service life of Tnemec's coatings will vary. For warranty, limitation of seller's liability and product information, please refer to Tnemec Product Data Sheets at tnemec.com or contact your Tnemec technical representative. © Tnemec Company, Inc. MB60C